

EXIT2RWEM

Thermoplastic LED Exit Signs


The series model offers a slim-profile, thermoplastic LED exit sign that is designed for long life, energy efficiency and uniform illumination in an economical package.



Features

- Dual-voltage input 120V/277V
- Maintenance-free nickel-cadmium battery
- Energy-saving LED
- Injection-molded, high-impact, UV-stabilized, UL 94 V-0 thermoplastic
- construction in white or black finish
- Top, back, J-box or end mounting through universal mounting plate and canopy
- Removable universal chevrons for directional indication
- Snap-fit curved faceplate design for installation without tools
- Universal single face and double face (extra faceplate included)
- Temp rating: 20°-30° damp
- DOE and CEC Registered
- UL 924 Listed for damp location

Dimensions

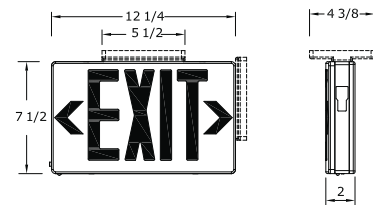

Ordering Information

Series	Faces	Letter Color	Finish	Battery	Options
EXIT	2 = Universal Face	R= Red	W = White	EM	Blank = Regular